

SG1000

SG1250



SUNGROW Inverter, Designed For TrinaPro



High Yield

- Efficient three-level technology,max.efficiency 99%
- 2 MPPT,wide MPP voltage
- Full power operation with out derating at 50°C
- One inver unit fails,the other unit continues operation



Saved Investment

- Low transportation and installation cost due to 10-foot container design
- DC 1500V system,low system cost
- Integrated LV auxiliary power supply



Easy O&M


- Integrated current and voltage monitoring function for online analysis and fast trouble shooting
- Module design and front service ,easy for maintenance
- DC circuit breaker design for convenient maintenance




Grid Support

- Compliance with local standards:CE, IEC 62109, IEC61727 and IEC 62116
- Low/High voltage ride through(L/HVRT)
- Active&reactive power control and power ramp rate control

Circuit Diagram

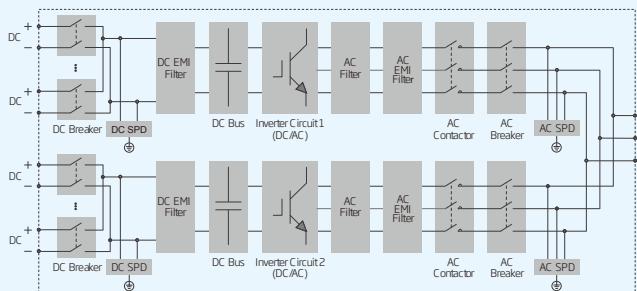

Efficiency Curve

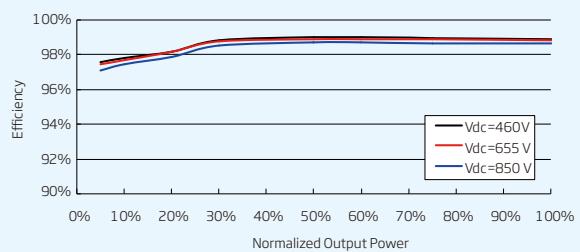

SG1000/SG1250

Input(DC)	SG1000	SG1250
Max.PV input voltage	1000V	
Min.PV input voltage/Startup input voltage	460V/500V	520V/540V
MPP voltage range for nominal power	460-850V	520-850V
No.of independent MPP inputs	1 or 2	
Max.No.of DC inputs	8 - 16	
Max.PV input current	2244A	2712A
Max.DC short-circuit current	2920A	3390A
Output(AC)		
Nominal AC power(at 50°C)	1000KW	1260KW
Max.AC output power at PF=1(at 45°C)	1100KW	1386KW
Max.AC apparent power(at 45°C)	1100KVA	1386KVA
Max.AC output current	2016A	2222A
AC voltage range	252-362V	288-414V
Nominal grid frequency/Grid frequency range	50Hz/45-55Hz,60Hz/55-65Hz	
THD	<3%(at nominal power)	
DC current injection	<0.5%In	
Power factor at nominal power/Adjustable power factor	>0.99/0.8 leading-0.8 lagging	
Feed-in phases/Connection phases	3/3	
Efficiency		
Max. efficiency/Euro. efficiency	99.0%/98.7%	
Protection		
DC input protection	Circuit breaker	
AC output protection	Circuit breaker	
Oversupply protection	DC Type II/AC Type II	
Grid monitoring/Ground fault monitoring	Yes/Yes	
Insulation monitoring	Yes	
Overheat monitoring	Yes	
Anti-PID function	Optional	
General Data		
Dimensions(W*H*D)	2991*2591*2438mm	
Weight	4.3T	
Isolation method	Transformerless	
Degree of protection	IP54	
Auxiliary power supply	220Vac,2Vac, 5/Optional:380Vac,up to 15KVA	
Operating ambient temperature range	-35 to 60°C(>50°C derating)	
Allowable relative humidity range(non-condensing)	0-95%	
Cooling method	Temperature controlled forced air cooling	
Max.operating altitude	5000m(>3000m derating)	
Display	Touch screen	
Connection	Standard:RS485,Ethernet;Optional:optical fiber	
Compliance	CEA,IEC 62109,IEC 61727,IEC 62116, IEC 60068,IEC616883,CE	
Grid Support	LVRT,HVRT,active & reactive power control and power ramp rate control	
Type designation	SG1250HV-10	