

THE Honey MODULE

POWERED BY **Trina**peak



CELL STRING OPTIMIZATION

260-275W
POWER OUTPUT RANGE

60 CELL
MULTICRYSTALLINE MODULE

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

Comprehensive Products And System Certificates


IEC61215/IEC61730/UL1703/IEC61701/IEC62716

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse gases Emissions Verification

OHSAS 18001: Occupation Health and Safety Management System



Trinasolar



Maximized Energy Harvest

- Optimization of each cell-string eliminate mismatch losses both within the module and between modules



Higher Energy Density

- Design into shade
- Reduce inter-row spacing



Design Flexibility and Simplicity

- For any rooftop condition and orientation



Improved Performance

- Less susceptible to hot spots



Highly reliable due to stringent quality control

- Tested to 3 times the IEC certification standard
- PID resistant
- 100% EL double inspection




No Additional Installation Expense

- No change in PV array design
- No additional hardware or communications required


LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 25 Year Linear Power Warranty

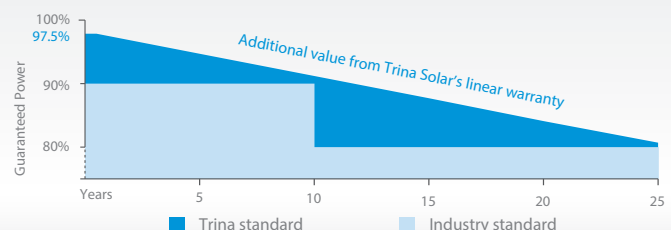


PRODUCTS | POWER RANGE
TSM-PD05.08D | 260-275W

DIMENSIONS OF PV MODULE(mm)

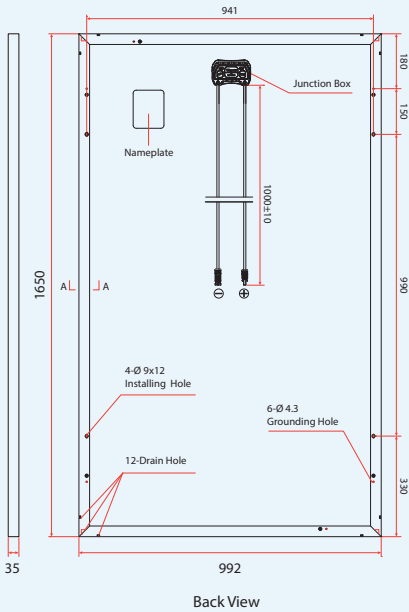


Back View




(A-A)

I-V CURVES OF PV MODULE(275W)

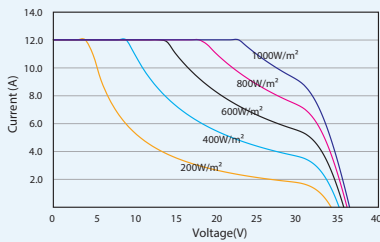

P-V CURVES OF PV MODULE(275W)

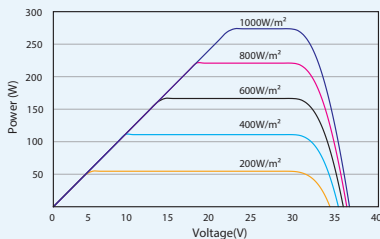

ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)*	260	265	270	275
Power Output Tolerance- P_{MAX} (W)	0 ~ +5			
Maximum Power Voltage- V_{MPP} (V)	28.8	29.0	29.1	29.3
Maximum Power Current- I_{MPP} (A)	9.04	9.16	9.29	9.41
Open Circuit Voltage- V_{OC} (V)	35.9	36.0	36.1	36.2
Short Circuit Current- I_{SC} (A)	12			
Module Efficiency η_p (%)	15.9	16.2	16.5	16.8

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{MAX} (Wp)	193	197	200	204
Maximum Power Voltage- V_{MPP} (V)	26.7	26.8	26.9	27.0
Maximum Power Current- I_{MPP} (A)	7.25	7.37	7.47	7.57
Open Circuit Voltage- V_{OC} (V)	33.2	33.3	33.4	33.6
Short Circuit Current- I_{SC} (A)	12			

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Multicrystalline 156.75 × 156.75 mm (6 inches)
Cell Orientation	60 cells (6 × 10)
Module Dimensions	1650 × 992 × 35 mm (65.0 × 39.1 × 1.38 inches)
Weight	18.6 kg (41.0 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	Black Anodized Aluminium Alloy
J-Box	IP 67 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), 1000 mm (39.4 inches)
Connector	MC4

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	44°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.41%/°C
Temperature Coefficient of V_{OC}	-0.32%/°C
Temperature Coefficient of I_{SC}	0%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1000V DC (IEC) 1000V DC (UL)
Max Series Fuse Rating	15A

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

WARRANTY

10 year Product Workmanship Warranty
25 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 30 pieces
Modules per 40' container: 840 pieces